

"See Thru the Night"


ASLL-26X-DN

Laser-Lite PTZ Night Vision Camera

- 312X zoom (26X optical, 12X digital)
- 400 Feet range illumination in total darkness
- 50-100 Feet range illumination thru fog
- Weather-proof, high die-cast aluminum housing with IP-66 rating and wiper over camera lens
- Full 360° rotation with 180° tilt
- Supports Pelco D and other standard protocols
- 128 Presets and 6 auto cruise settings



Camera Dimensions

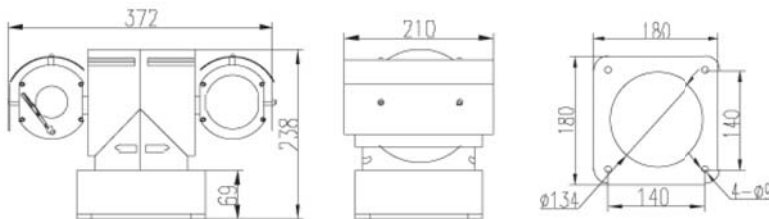

Shock Absorber

Camera Specifications

MODEL	ASLL-26X-DN
IMAGE SENSOR	1/4 ExView HAD CCD
ACTIVE PIXELS	752H x 582V
SYNCHRONIZATION	Internal / Extrinsic
VIDEO OUTPUT	1.0Vp-p at 75ohm
WHITE BALANCE	Auto / Manual
SCANNING FREQUENCY	15.6KHz(H) 5-Hz
HORIZONTAL RESOLUTION	480TVL
S/N RATIO	>50dB
ELECTRONIC SHUTTER	1/1 ~ 1/10,000s
MIN. ILLUMINATION	0.01 Lux
FOCAL LENS	f=3.5~91mm
ZOOM	Total: 312X Optical: 26X Digital: 12X
FOCAL & IRIS	Auto / Manual

Mechanical Specifications

MODEL	ASLL-26X-DN
PRESET PAN SPEED	80°/s
PRESET TILT SPEED	60°/s
MANUAL PAN SPEED	0°~60°/s
MANUAL TILT SPEED	0°~40°/s
PAN RANGE	360° continuously
TILT RANGE	+88° ~ -87°
PRESET POSITIONS & CRUISING TRACKS	128 (Max.), 6 tracks
COMMUNICATIONS	Multi-protocol, RS485
WORK TEMPERATURE	-31°F ~ +131°F (-35°C ~ +55°C)
RELATIVE HUMIDITY	90%
IP GRADE	IP66
POWER SUPPLY	AC24V
IMPACT RESISTANCE	≥4G
WEIGHT	15.5lbs (7Kg)