



AST-BE3815NVR

Weather Proof IR CAMERA



Features

- 1/3 inch Sony Super HAD CCD
- High Resolution 550 TV Lines
- 2x Digital Zoom
- **True Day/Night (ICR)**
- Min. Illumination: 0 Lux (IR LED On)
- **Built-in IR LED (42EA) & Sensor (1EA)**




OPTIONAL MODEL

-Contact authorized AdSec dealer to learn more about additional AST-BE3815NVR models.

ACCESSORIES

-Contact authorized AdSec dealer to learn more about additional AST-BE3815NVR accessories.

DIMENSIONS

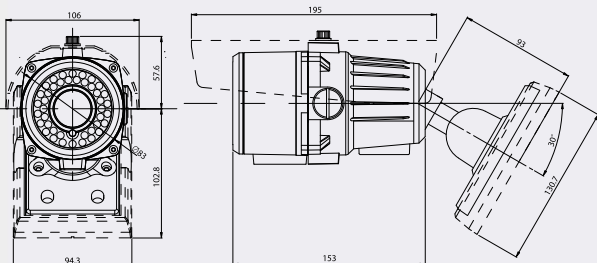

SPECIFICATIONS

Model	AST-BE3815NVR
Signal System	NTSC
Scanning System	2:1 Interlace
Scanning Frequency	15.734 KHz (H) / 59.94 Hz (V)
Digital Zoom Ratio	2x Digital Zoom (On/Off)
Image Sensor	1/3 Inch SONY Super HAD CCD
Total Pixels	811(H) x 508(V) 410K
Effective Pixels	768(H) x 494(V) 380K
Horizontal Resolution	550 TV Lines
Video Output	1.0V p-p (75Ω, Composite)
S/N Ratio	More than 50dB(AGC Off)
Lens	DC Iris Vari-focal Lens (f=3.8~9.5mm)
Min.Illumination	0.3 Lux (Color), 0.008 Lux (DSS 32FLD), 0 Lux (IR LED On)
IR LED and Sensor	IR LED 42EA (850mm 15°, 30°), Sensor 1EA
IR LED Visible Range	Max. 40m
Day&Night	Electronic Sensitivity-up (DSS), ICR (Sensor type)
White Balance	Auto
AGC,BLC,Flickerless	On/Off (Dip Switch)
Shutter Speed	1/60~1/100,000 Sec.
Supplied Voltage	24VAC(24V~28V) / 12VDC(11V~15V)
Power Consumption	Max.11W / 1.4A
Dimensions(ØxH)	83x 160.4(H) mm
Weight	Approx. 2.43 lbs.